




Universe	Professional
Type	Verticality
Category	Kits
Subcategory	Kits

ASAP & ASAP LOCK Kits

The ASAP & ASAP LOCK kits are pre-assembled and ready-to-use personal fall arrest systems that meet OSHA fall protection regulations and the ANSI Z359.15 Safety Requirements for Single Anchor Lifelines and Fall Arresters standard when used with RAY 11 lifelines. Each kit comes with a mobile fall arrester, energy absorber, and connector(s).

Installed on a lifeline, these mobile fall arresters follow the user as they move, whether on an inclined or vertical surface. In case of a shock load or sudden acceleration, they lock onto the lifeline and stop the worker, even if grabbed during the fall.

There are 5 kit options to choose from, allowing at-height workers to select the assembly that will best meet their job site requirements:

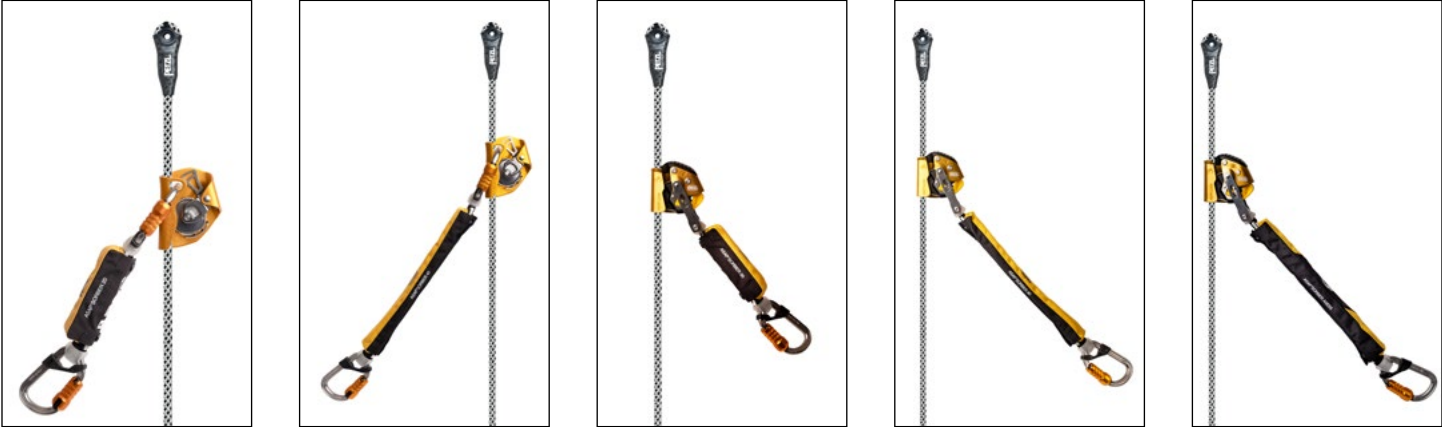

ASAP 20 KIT

ASAP 40 KIT

ASAP LOCK 20 KIT

ASAP LOCK 40 KIT

ASAP LOCK AXESS KIT

RAY 11 lifeline required for compliance with ANSI Z359.15, (sold separately).

MOBILE FALL ARRESTERS | Two Options

- The ASAP is a simple mobile fall arrester appropriate for use on sloped roofs, in swing stages, on ladders and on vertical structures.
- The ASAP LOCK features an integrated locking function that allows the user to immobilize the device on the lifeline in order to reduce the potential fall distance. This function is also useful when working in windy environments, helping to keep tension in the lifeline. The connection arm makes the system drop-resistant when passing intermediate anchors.

ENERGY ABSORBERS | Three Options

- The ASAP'SORBER energy absorbers may only be used with an ASAP or ASAP LOCK mobile fall arrester. They allow the user to work at a distance from the rope, in order to protect it during certain work phases. Equipped with tear-webbing inside a pouch that opens on each end, the absorbers are protected from abrasion, while allowing for regular inspection.

There are three energy absorbers available:

- ASAP'SORBER 20 provides a reduced fall distance and thus requires less clearance, designed for users up to 285 lbs.
- ASAP'SORBER 40 allows the worker to be positioned at a greater distance from the lifeline, designed for users up to 285 lbs.
- ASAP'SORBER AXESS is rated for a one or two-person load (up to 550 lbs.). That weight may be encountered during a partner rescue operation.

CONNECTORS

- The Bm'D is a lightweight asymmetrical carabiner made of aluminum. It is a D-shape connector with a TRIACT-LOCK automatic locking system. The sleeve is reinforced for greater front and lateral gate strength.
- The CAPTIV positioning bar promotes loading of the carabiner on the major axis and limits the risk of rotation and keeps it well integrated with an ASAP'SORBER.

LIFELINES | Sold Separately

- The RAY 11 is a static 11 mm kernmantle rope designed for use with the ASAP and ASAP LOCK and meets ANSI lifeline requirements with or without sewn terminations. It is available in white in 25, 50, 75, 100 and 200 ft lengths with one sewn termination at one end. It is also available in 150, 200, 600 and 1,200 ft lengths with no terminations in white, yellow, blue and black.

Short Description	Pre-assembled ASAP and ASAP LOCK Personal Fall Arrest System
Selling Points	
ASAP	<ul style="list-style-type: none">• Constant fall protection:<ul style="list-style-type: none">- Arrests falls, slides, and uncontrolled descents- Works on vertical or angled rope- Locks on the rope even if grabbed during the fall• Simple to use, and effective:<ul style="list-style-type: none">- Moves up or down the rope, without any manual operation- Easy to install and remove at any point on the rope
ASAP LOCK (in addition to above)	<ul style="list-style-type: none">• Integrated locking function allows the user to immobilize the device in order to reduce the potential fall distance. In the event of a strong wind, this function also prevents the rope from being blown upward• Simple to use, and effective:<ul style="list-style-type: none">- Connection arm makes the system drop-resistant when passing intermediate anchors

ASAP'SORBERS	<ul style="list-style-type: none"> Energy absorber to work at a distance from the lifeline: <ul style="list-style-type: none"> The ASAP'SORBBER AXESS can be used for loads of up to 550 lbs in two-person rescue situations
RAY 11	<ul style="list-style-type: none"> Static rope for greater efficiency in work at height <ul style="list-style-type: none"> Standard diameter provides a good grip for easier handling 100% polyester construction with a braided core EverFlex technology provides great flexibility over time and under a variety of conditions (water, dust, mud) Available in four colors: white, black, yellow and blue Standard lengths: 25, 50, 75, 100 & 200 ft lengths in white with one sewn termination, 150, 200, 600 and 1200 feet in white, yellow, blue and black with no terminations. Customization is available.

Specification Pre-assembled ASAP and ASAP LOCK kits that meet OSHA fall protection regulations and the ANSI Z359.15 standard when used with lifeline and components listed above.

Specifications by reference

Reference(s)	K097BA00	K097BA01	K097AA01	K097AA00	K097AA02
Name	ASAP 20 KIT	ASAP 40 KIT	ASAP LOCK 20	ASAP LOCK 40	ASAP LOCK AXESS
Made In	FR	FR	FR	FR	FR
Guarantee	3 years	3 years	3 years	3 years	3 years
Inner Pack Count	1	1	1	1	1
Quantity Per Box	8	8	8	8	8
EAN	3342540842427	3342540842434	3342540842410	3342540832923	3342540842700

RAY 11 with Sewn Termination (sold separately)

Specifications by reference

Reference(s)	R100BA00	R100BA01	R100BA02	R100BA03	R100BA04
Length	25 ft	50 ft	75 ft	100 ft	200 ft
Color(s)	white	white	white	white	white
Made In	CZ	CZ	CZ	CZ	CZ
Guarantee	3 years	3 years	3 years	3 years	3 years
Inner Pack Count	1	1	1	1	1
Quantity Per Box	3	3	3	3	3
EAN	3342540836198	3342540836204	3342540836310	3342540836327	3342540836334